



**CAPACITORES DE OPERACIÓN**  
MOTOR RUN CAPACITORS

FECHA (DATE): November 20, 2025

CLIENTE (CUSTOMER): ARCO ELECTRIC PRODUCTS

NP CLIENTE (CUSTOMER PN): CA0102

NUMERO DE PARTE(PART NUMBER): 325P306P66P46A4EAR


**CARACTERISTICAS ELECTRICAS (ELECTRICAL CHARACTERISTICS)**

PARAMETER	VALUE
Rated capacitance	30.0 [ $\mu$ F]
Capacitance Tolerance	-0 [%] +6 [%]
Rated voltage	660 [VAC]
Rated frequency	50/60 Hz
Operating Temperature	-40°C to 70°C
Safety Class	S2
Maximum Disipation Factor	0.1 [%]
Standard in Compliance	EIA-456-A UL 810
UL file	E229850


**CARACTERISTICAS MECANICAS (MECHANICAL CHARACTERISTICS)**

Protection	Pressure Interruptor
Connection	Quadruple Quick Connector 0.250"x0.032" (2x)
Dielectric	Self-Healing Metallized Polypropylene
Material Case	Aluminum
Storage Temperature	-40°C to 95°C

**DIMENSIONES EN mm (DIMENSIONS IN mm)**

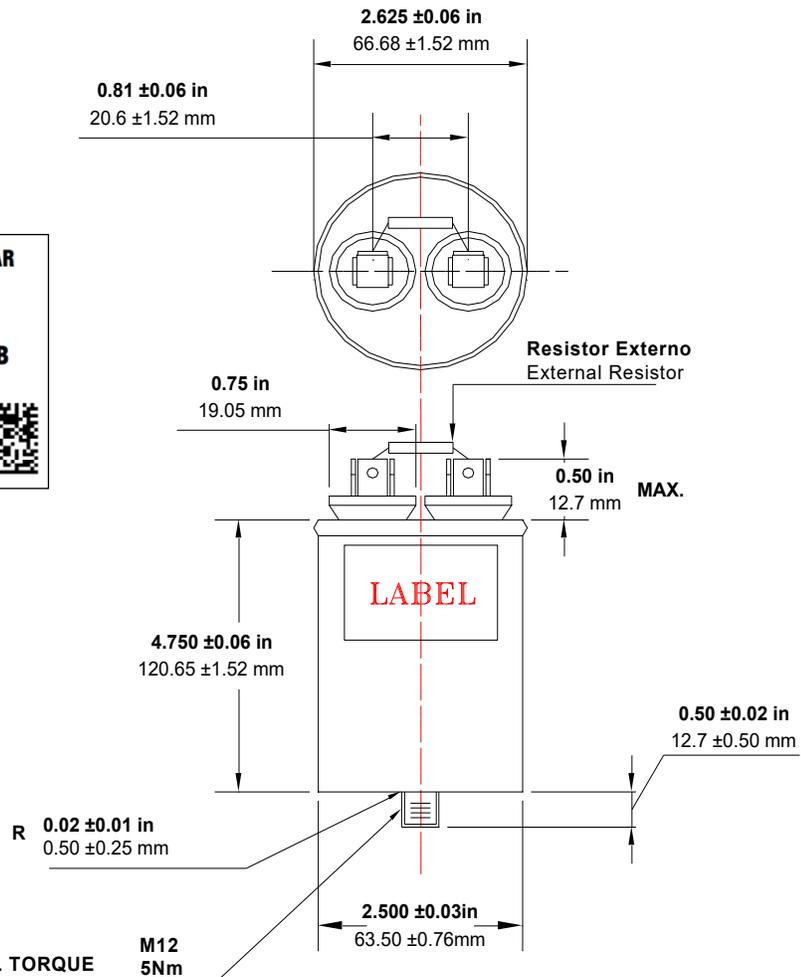

**ETIQUETA (LABEL):**

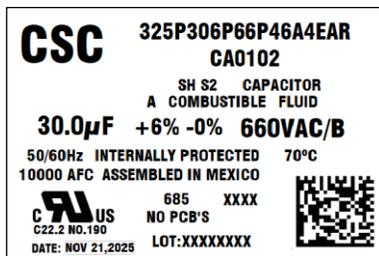

**RESISTENCIA AL TORQUE**